


20-YEAR MAX WARRANTY

TPO ONLY

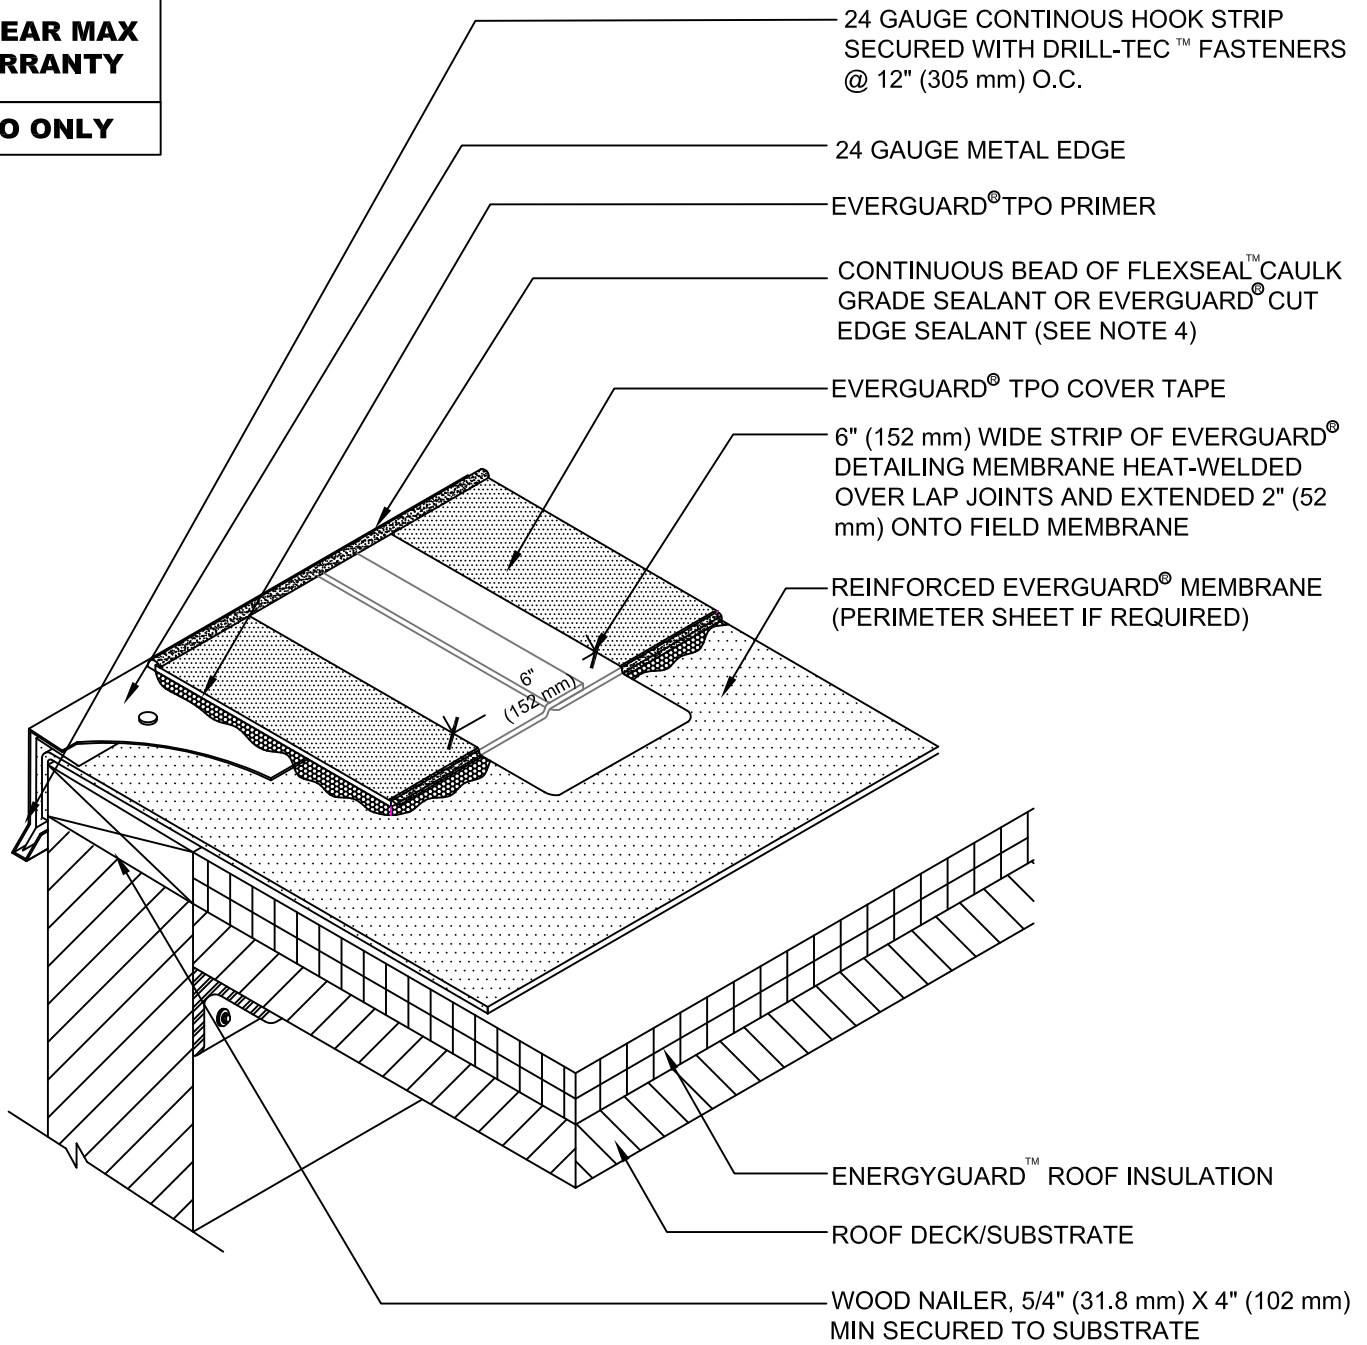

NOTE:

1. CLEAN METAL AND MEMBRANE WITH EVERGUARD® SEAM CLEANER AND ALLOW TO DRY BEFORE PRIMING.
2. EVERGUARD® TPO COVER TAPE IS ONLY TO BE USED WITH TPO MEMBRANE SYSTEMS ONLY.
3. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A HARD BOARD IS REQUIRED ON MECHANICALLY FASTENED SYSTEMS ONLY.
4. FLEXSEAL™ CAULK GRADE SEALANT SHOULD BE FEATHERED OUT. ENSURE PRIMER EXTENDS UNDER FLEXSEAL™ CAULK GRADE SEALANT.
5. WHEN ROOF SLOPE IS GREATER THAN 1:12 IN CLIMATES WITH SNOW AND ICE, REFER TO ALTERNATE EDGE DETAIL.
6. THIS DETAIL IS **NOT** TO BE USED ON SLOPES GREATER THAN 1:12. FOR SLOPES GREATER THAN 1:12, REFER TO EVERGUARD® DETAIL 218 OR 219.



EverGuard
SINGLE-PLY ROOFING SYSTEMS
ROOF EDGE SERIES

DRAWING #
215B

TPO COVER TAPE OVERLAP AT ROOF EDGE DETAIL

THIS DETAIL APPLIES TO:
Adhered Systems
Mechanically Attached Systems
Self-Adhered Systems
TriPosite Systems

www.gaf.com
1 Campus Drive,
Parlisppany, NJ 07054

SCALE
N.T.S.

REVISION DATE
8-16-17