


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"
(102mm)

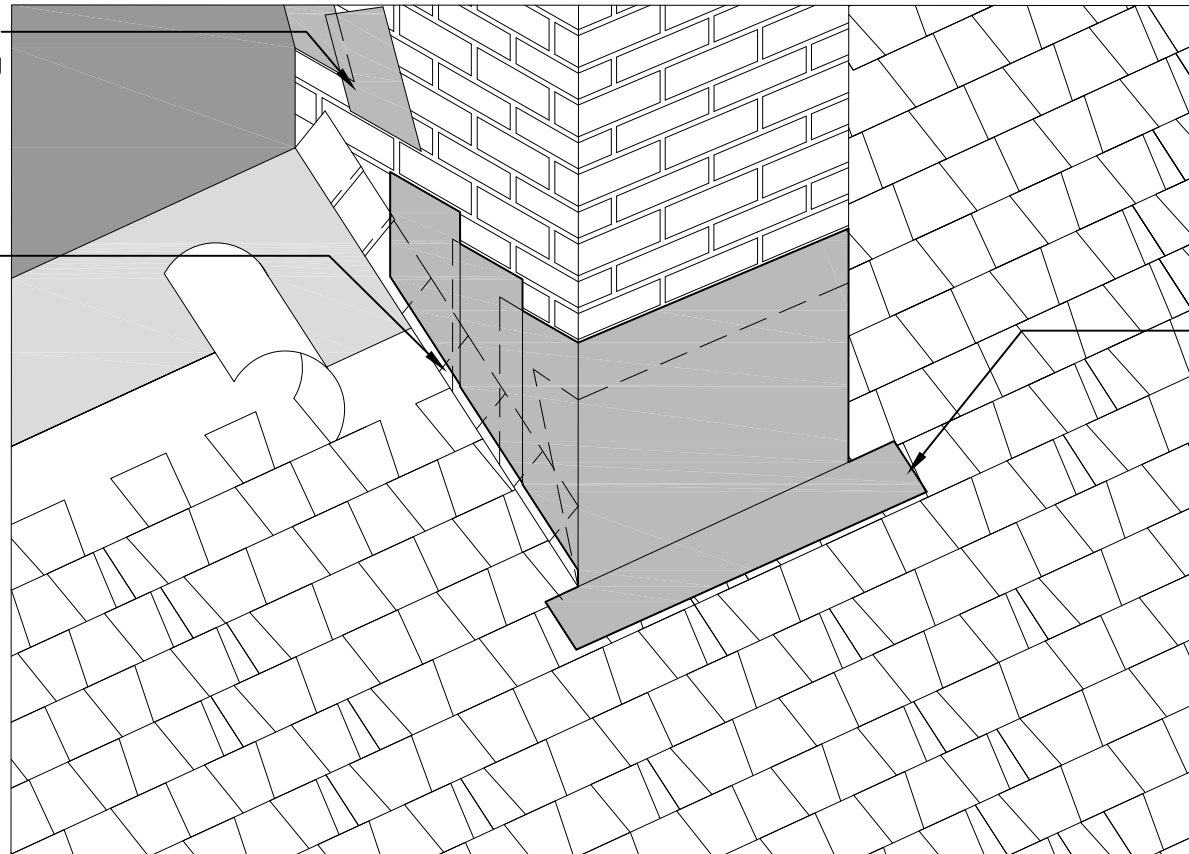

1361 Alps Rd.
Wayne, NJ 07470
www.gaf.com

BRAND SERIES

**TIMBERLINE
SERIES**
Lifetime Shingles

REVISION DATE

1-01-12

SCALE

N.T.S

CHIMNEY FLASHING DETAIL

DETAIL NUMBER

07

DETAIL REFERENCE

SS-TS