



GAF Specification Keys

TPO, PVC, SBS, and APP



Single-Ply Specification Key

INSULATED TPO MECHANICALLY ATTACHED SYSTEMS SPECIFICATION PLATE

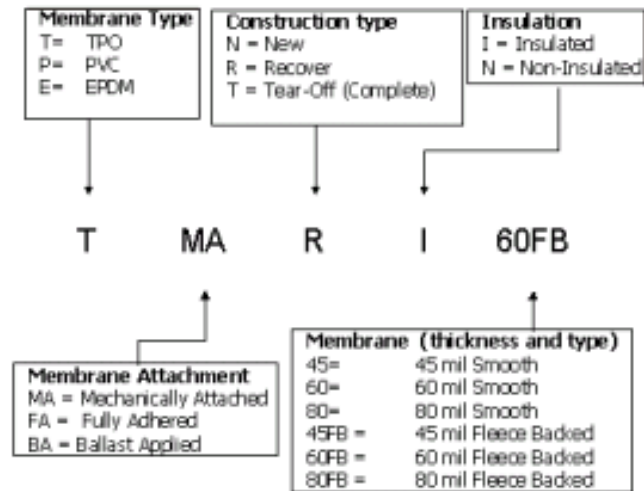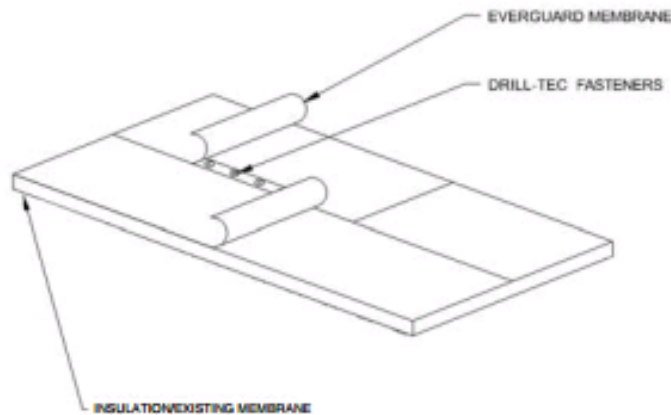

SBS Mod-Bit Ruberoid® Specification Key

GAFMC SBS COLD APPLIED MODIFIED BITUMEN ROOFING SYSTEMS KEY TO SPECIFICATION NUMBERS

Substrate

N Nailable
 NN Non-nailable
 I Insulated
 R Recover over existing roof.
 May include additional insulation

Application Method

CA Cold Applied Adhesive
 These specifications can be applied using LeakBuster™ Matrix™ Modified Bitumen adhesives. References to cold applied installations require the specification designation to be followed by a "(CA)" to indicate that it is to be cold applied.

I-1-2-20/MGP(CA)

Number of Base Plies

0 None
 1 One Ply
 2 Two Plies
 3 Three Plies

Base plies can include:
 GAFGLAS® #75 Base Sheet,
 GAFGLAS® #80 Ultima™ Base Sheet, GAFGLAS® Stratavent® Eliminator™ Nailable.

Top Ply/Plies of RUBEROID® Membranes

MG RUBEROID® Mop (Granule)
 MS RUBEROID® Mop (Smooth)
 MGFR RUBEROID® Mop 170FR
 MGPFR RUBEROID® Mop FR
 DS RUBEROID® Dual Smooth
 DFR RUBEROID® Dual FR
 20 RUBEROID® 20
 30 RUBEROID® 30
 30FR RUBEROID® 30FR
 30FREC EnergyCap™ SBS 30 FR

Number of Plies of RUBEROID® Membranes

1 One Ply
 2 Two Plies

Cold Applied Roofing Systems



North Zone includes Alaska
 West Zone includes Hawaii
 South Zone includes Puerto Rico

Note: The West Zone comprises low elevation regions only. Mountainous areas in the South and West Zones should comply with North Zone specifications.

SBS Mod-Bit Heat Weld[®] Specification Key

GAFMC SBS HEAT WELD™ ROOFING SYSTEMS KEY TO SPECIFICATION NUMBERS

Substrate

N Nailable
 NN Non-nailable
 I Insulated
 R Recover over existing roof.
 May include additional
 insulation.

I-1-2-25/HGFR

Number of Base Plies

0 None
 1 One Ply
 2 Two Plies
 3 Three Plies

Base plies can include:
 GAFGLAS® #75 Base Sheet,
 GAFGLAS® #80 Ultima Base
 Sheet, GAFGLAS® Stratavent®
 Eliminator™ Nailable, GAFGLAS®
 FlexPly™ 6 or GAFGLAS® Ply 4.

Top Ply or Plies of Heat Weld™ Membranes

HG Heat Weld™
 25 Heat Weld™ 25
 HS Heat Weld™ Smooth
 HGFR Heat Weld™ 170 FR
 HGP Heat Weld™ Plus
 HGPFR Heat Weld™ Plus FR
 HGPFREC EnergyCap™ SBS Heat Weld™ Plus FR
 SA RUBEROID® SA or Liberty™ BasePly

Number of Plies of Heat Weld™ Membranes



1 One Ply
 2 Two Plies



North Zone includes Alaska
 West Zone includes Hawaii
 South Zone includes Puerto Rico
 Note: The West Zone comprises
 low elevation regions only.
 Mountainous areas in the South
 and West Zones should comply
 with North Zone specifications.

Ruberoid® Liberty® Specification Key



RUBEROID® SA LIBERTY™ SBS SELF-ADHERED MODIFIED BITUMEN ROOF SYSTEMS KEY TO SPECIFICATION NUMBERS

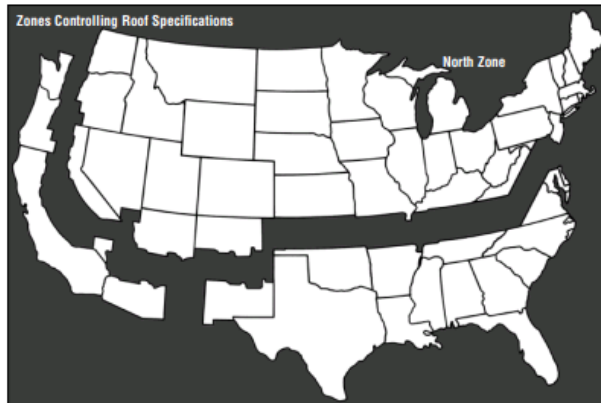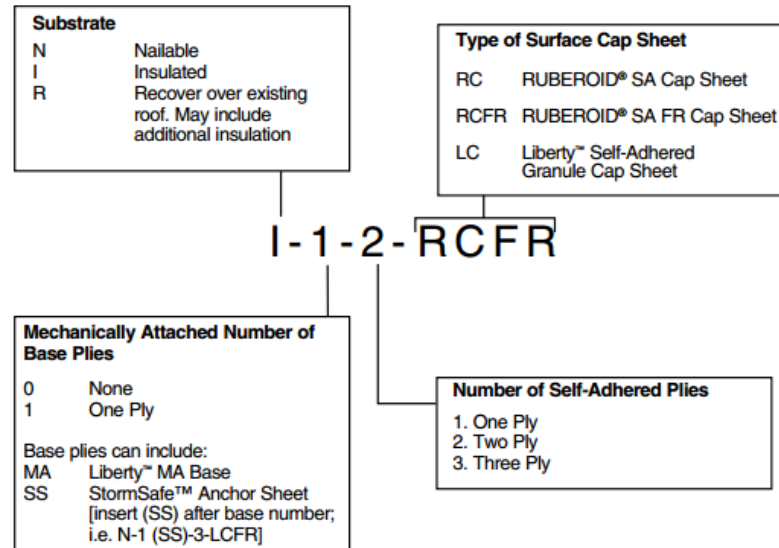

North Zone includes Alaska
 West Zone includes Hawaii
 South Zone includes Puerto Rico
 Note: The West Zone comprises low elevation regions only. Mountainous areas in the South and West Zones should comply with North Zone specifications.

APP Mod-Bit Specification Key

GAFMC APP MODIFIED BITUMEN ROOFING SYSTEMS KEY TO SPECIFICATION NUMBERS

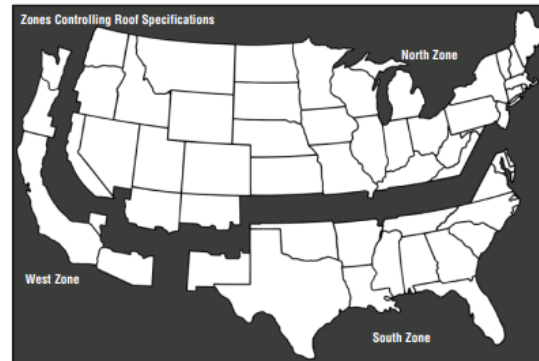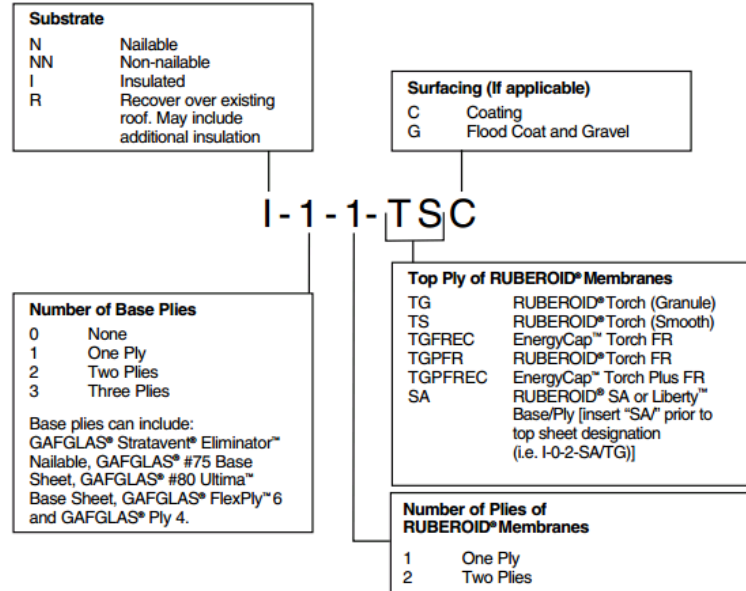

North Zone includes Alaska
West Zone includes Hawaii
South Zone includes Puerto Rico
Note: The West Zone comprises low elevation regions only. Mountainous areas in the South and West Zones should comply with North Zone specifications.